

Instructions for use

To read first

- Patchwood is only intended for indoor use where contact with splash water or condensation is very short term.
- Wood is subject to dimensional movements (shrinkage/swelling) under the effect of humidity variations.
- In order to prevent this, **the following recommendations must be observed.**

1. Storage

- Store the wrapped Patchwood flat on top of each other in a dry, closed room. Isolate them from the floor by laying them on battens spaced 1 m apart and orientated in the direction of the width.
- Only remove the plastic film when applying the finish.

2. Cut-outs

- Leave a minimum of 20 cm between two cuts and 10 cm from the longitudinal edge in the Patchwood.

3. Finishing

- Apply the appropriate finish for the purpose before installing and fitting the Patchwood, with a minimum of two coats.
- Apply an identical finish (volume of product and number of coats) to each face and edge to balance the moisture content of the Patchwood.

4. Fixing

- Do not lay Patchwood on a solid surface, but preferably on strips or battens.
- For use as a work surface, leave a gap of 3 to 5 mm between the Patchwood and the wall. Apply a silicone-type sealant to fill the gap.

5. Use


- Appliances that generate heat (pans, etc.) must not be placed directly on the Patchwood. Use a heat-resistant insert (trivet, etc.).
- Depending on the use and the finish applied, provide adequate maintenance.




Common uses :

Stair treads
Table tops
Furniture
Interior layout
Decoration
And many more...

Screw fixing



Worktop
Patchwood

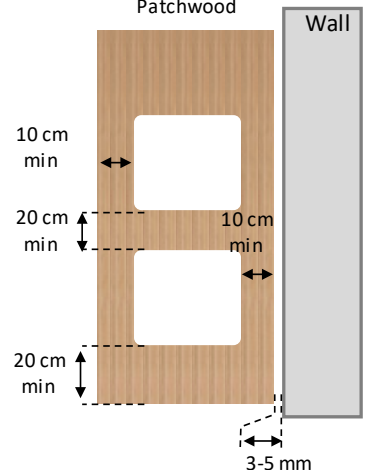

This product can be sold PEFC or FSC® certified on request